

# ControlCenter CC-1D/CC-2D/CC-3D

digital zone controllers

## Product Overview

Bose Professional ControlCenter digital zone controllers provide volume and source selection for Bose Professional CSP, ControlSpace ESP, and ControlSpace EX sound processors. Powered using PoE, multiple processors can be used simultaneously on an Ethernet-based network. Three models are available in either black or white, feature volume/source LED indicators, and fit one-gang electrical boxes in North America, Europe, and Japan.

## Key Features

**Three main models:** the CC-1D for simple volume control, the CC-2D for volume plus A/B source selection, and the CC-3D for volume plus A/B/C/D source selection

**User-friendly interface** features a single rotary encoder for volume (knob turn), source selection (knob push) and mute (knob push and hold) with an illuminated volume and source LED indication

**Attractive, understated styling** with two color options and regional variants to blend in seamlessly with most spaces


**Networkable and PoE-powered:** Ethernet-based and uses PoE for power; no special cabling or external power supplies required

**Programmable:** Installers can set discrete volume ranges and source options in software; multiple units can be used simultaneously in expansive projects with Bose Professional CSP, ControlSpace ESP, and ControlSpace EX-based systems

**Custom labels:** Each zone controller includes a sheet of pre-printed labels, with two blanks for custom labeling

**Regional variants:** Each main model comes in three regional sub-models to support different-sized electrical boxes. North American and Japanese models are designed for use with Decora®-style wall plate covers (not included). The 86 mm European model is supplied as a finished wall plate

**Compatible** with Bose Professional CSP, ControlSpace ESP, and ControlSpace EX sound processors, and PowerMatch networked amplifiers

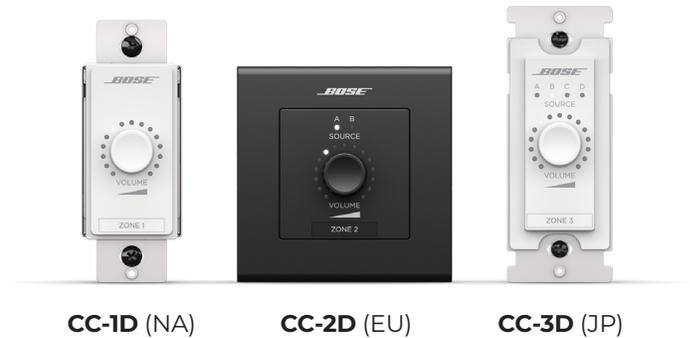

## Technical Specifications

Connector	1 Ethernet port (RJ-45)
Power	Power-over-Ethernet (PoE) switch required
Operating Temperature	0° C to 40° C (32° F to 104° F)
Capacity	Up to 16 units when using Bose Professional CSP processors Up to 32 units when using Bose Professional ControlSpace EX/ESP processors

## Product Codes

	ControlSpace CC-1D	ControlSpace CC-2D	ControlSpace CC-3D
US-120V (Black)	808461-0110	808928-0110	808930-0110
US-120V (White)	808461-0210	808928-0210	808930-0210
EU-230V (Black)	808461-2110	808928-2110	808930-2110
EU-230V (White)	808461-2210	808928-2210	808930-2210
JP-100V (Black)	808461-3110	808928-3110	808930-3110
JP-100V (White)	808461-3210	808928-3210	808930-3210


TECHNICAL DATA

# ControlCenter CC-1D/CC-2D/CC-3D

digital zone controllers

## CC-1D


EU



Front View

Right View  
DIMENSIONS APPLY TO BOTH SIDES


JP



Front View

Right View  
DIMENSIONS APPLY TO BOTH SIDES

US

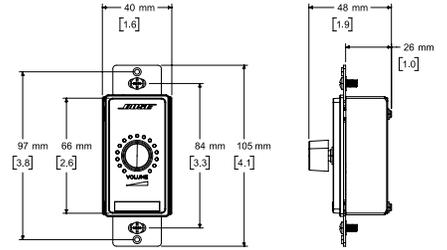


Front View

Right View  
DIMENSIONS APPLY TO BOTH SIDES

## CC-2D


EU



Front View

Right View  
DIMENSIONS APPLY TO BOTH SIDES


JP



Front View

Right View  
DIMENSIONS APPLY TO BOTH SIDES

US

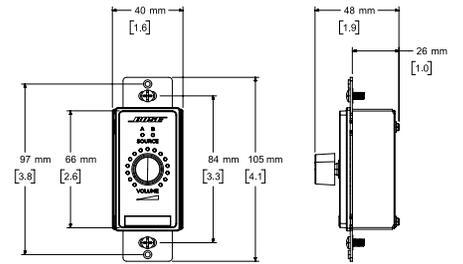


FRONT VIEW

RIGHT VIEW  
DIMENSIONS APPLY TO BOTH SIDES

## CC-3D


EU

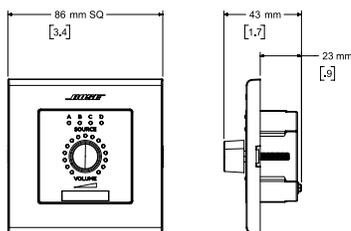

Front View

Right View  
DIMENSIONS APPLY TO BOTH SIDES


JP



FRONT VIEW

RIGHT VIEW  
DIMENSIONS APPLY TO BOTH SIDES

US

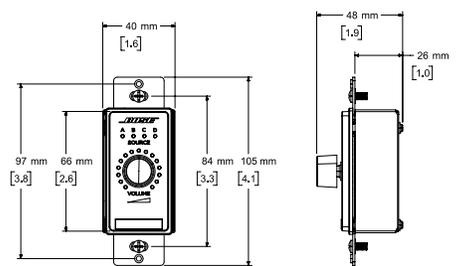

FRONT VIEW

RIGHT VIEW  
DIMENSIONS APPLY TO BOTH SIDES

Bose is a trademark of Bose Corporation. ControlSpace and PowerMatch are trademarks of Transom Post OpCo LLC. All other trademarks are the property of their respective owners. ©2023 Transom Post OpCo LLC.

For additional specifications and application information, please visit [BoseProfessional.com](http://BoseProfessional.com). Specifications subject to change without notice. 07/2023