

Videobar VB1

all-in-one USB conferencing device



Product Overview

The Bose Professional Videobar VB1 is an all-in-one USB conferencing device that brings premium audio and video to small meeting areas — from huddle spaces to medium-sized rooms. Be seen clearly. Be heard and understood fully. Six beam-steering microphones automatically focus on voices in the room and reject noise. A 4K ultra-HD camera with autoframing delivers crystal-clear video, helping remote participants feel like they're in the room. Bose Professional sound supports multimedia presentations, plays *Bluetooth*[®] audio, and ensures voices on the call sound natural. Single-cable connectivity means there's no need for separate audio and video cables at the table, reducing clutter. Whether it's a quick morning check-in or a full-afternoon workshop, the Videobar VB1 helps you huddle up, see more, hear more, and work better.

Key Features

Bring the Bose Professional experience to huddle spaces and medium-sized conference rooms with an all-in-one solution that requires minimal setup and delivers premium audio and video performance

Make conversation more natural with six beam-steering microphones that actively focus on voices and reject noise; and auto EQ that delivers optimized audio to all participants

Communicate and be seen more clearly — a 4K ultra-HD camera with autoframing allows everyone to see and understand the presenter, whiteboard, flipchart, or other in-room objects — and feel more like they're together in the same room

Bring enhanced video and audio performance to popular Unified Communications platforms such as Microsoft Teams, Google Meet, Zoom, and more

Support multimedia presentations with premium audio with Bose Professional transducers that deliver room-filling sound from a USB-connected laptop or wireless *Bluetooth* device

Clean up the conferencing experience with single-cable connectivity that eliminates clutter and an elegant low-profile design that complements the room and improves aesthetics

Mount easily in multiple ways with included table stand and wall-mount kit or optional mud ring and display mounting kit

Connect to existing network infrastructure, making installation and troubleshooting faster and allowing for remote updates, management, and monitoring

Configure easily with Videobar Configuration software, available as an app or via web browser; and manage remotely with the Videobar Administration software which displays real-time status and allows for easy single-unit or system-wide changes

Control settings in real time from a smartphone using the Videobar Mobile app to easily adjust volume, mute, pan, tilt, zoom, zoom presets, and *Bluetooth* pairing

Easily connect a smartphone via *Bluetooth* connectivity to use as a standalone speakerphone or stream music

TECHNICAL DATA

Videobar VBI

all-in-one USB conferencing device

Technical Specifications

LOUDSPEAKER ARRAY	
Configuration	Stereo loudspeakers, ported enclosure
Amplifier Power	20 W per channel, < 0.3% distortion over frequency range
Frequency Response (-10 dB)	85 – 20,000 Hz
Maximum SPL @ 1 m	89 dB (IEC 60268-5, mono input, wall-mounted)
MICROPHONE ARRAY	
Configuration	6 microphones
Frequency Response (±3 dB)	20 – 15,000 Hz
Pickup Range	6.0 m (19.7 ft)
Technology	Static and adaptive dynamic beam-forming, 3 exclusion zones, stereo acoustic echo cancellation (AEC), digital noise suppression
CAMERA AND VIDEO	
Field of View (FOV)	123° diagonal × 115° horizontal × 81° vertical
Image Sensor	8 MP
Focus Distance	0.5 m (1.6 ft) to ∞
Lens	Up to 5x digital zoom
Positioning	Autoframing capability or manual pan-tilt-zoom (PTZ) with 3 configurable presets (Home, 1, 2)
Processing	Automatic white balance, automatic brightness, digital noise reduction
USB Device Video Class (UVC)	v1.1
Supported Video Resolutions	UHD 2160p (4K), 1080p, 720p, 960×480, 848×480, 640×480, 640×360, 432×240 (30 fps)
Video Encoding	H.264, M-JPEG
CONNECTIONS	
USB	USB Type-C® to host computer (with DisplayLink) (USB 3.0 UAC, UVC, HID)
Network	Wired: RJ-45, 1 Gbps Ethernet (IEEE 802.3) Wireless: Wi-Fi 802.11ac
<i>Bluetooth</i>	<i>Bluetooth 4.2 HSP, A2DP, AVRCP, BLE</i>
Display	HDMI 1.4b and 2.1 output (to display, from host computer)
Analog Audio	Stereo 3.5 mm (1/8 in) input
General Purpose	2-pin Euroblock general-purpose input
Power	Via external power supply with localized power cord (included) Input: 110 VAC – 240 VAC, 50/60 Hz, 1.5 A max. Output: 24 VDC, 1.875 A
SOFTWARE APPLICATIONS	
Control/Configuration	Videobar Configuration software (available for Windows and macOS or via web browser) Videobar Administration software (available for Windows) Videobar Mobile app (available for iOS and Android)

For additional specifications and application information, please visit BoseProfessional.com. Specifications subject to change without notice. 11/2023

Videobar VB1

all-in-one USB conferencing device

SYSTEM REQUIREMENTS	
Operating System	Windows 7, 8.1, or 10 macOS 10.10 or higher Chrome OS (Google Chromebook)
REGULATORY	
Safety	IEC/UL/EN 60065:2014/A11:2017, IEC/UL/EN 62368-1:2014/A11:2017
EMC	FCC Part 15B Class B, ICES-003 Class B, CISPR 13, EN55032 Class B, EN55035, EN61000-3-2, EN61000-3-3, BSMI CNS13439
Wi-Fi and <i>Bluetooth</i>	FCC Part 15C, RSS-GEN, RSS-247, RSS-102, EN300328, EN301893, EN301489
Environmental	RoHS
PHYSICAL	
Operating Temperature	0 °C to 40 °C (32 °F to 104 °F), 90% non-condensing humidity
Storage Temperature	-40 °C to 70 °C (-40 °F to 158 °F), 93% relative humidity
Mounting	Table stand with mounting hardware (included) Wall-mount kit with mounting hardware (included) Display mounting kit (optional) Mud ring (optional)
Product Dimensions (Width × Height × Depth)	686 mm × 48 mm × 96 mm (27.0 in × 1.9 in × 3.8 in)
Net Weight	2.5 kg (5.6 lb)
Shipping Weight	5.4 kg (12.0 lb)
Included Accessories	Videobar VB1 HDMI 2.0 cable, 1.5 m (4.9 ft) USB-C® 2.0 cable, 5.0 m (16.5 ft) Infrared remote control with 2 AAA batteries Wall-mount kit with mounting hardware Table stand with hardware Power supply with localized power cord USB-A-to-C adapter 2-pin Euroblock connector Quick start guide, table-mount setup guide, wall-mount setup guide, safety instructions
Optional Accessories	Display mounting kit (Videobar Display Mounting Bracket) Right-angle USB 3.1 cable, 2.0 m (6.5 ft) (Videobar Right-angle USB 3.1 Cable) Mud ring (Videobar Mud Ring)
PRODUCT CODES	
Videobar VB1, 120 V, US	842415-1110
Videobar VB1, 230 V, EU	842415-2110
Videobar VB1, 100 V, JP	842415-3110
Videobar VB1, 240 V, UK	842415-4110
Videobar VB1, 240 V, AU	842415-5110
Display mounting kit	869196-0010
Right-angle USB 3.1 cable	843944-0010
Mud ring	861846-0010


For additional specifications and application information, please visit BoseProfessional.com. Specifications subject to change without notice. 11/2023

TECHNICAL DATA

Videobar VB1

all-in-one USB conferencing device

Dimensions¹

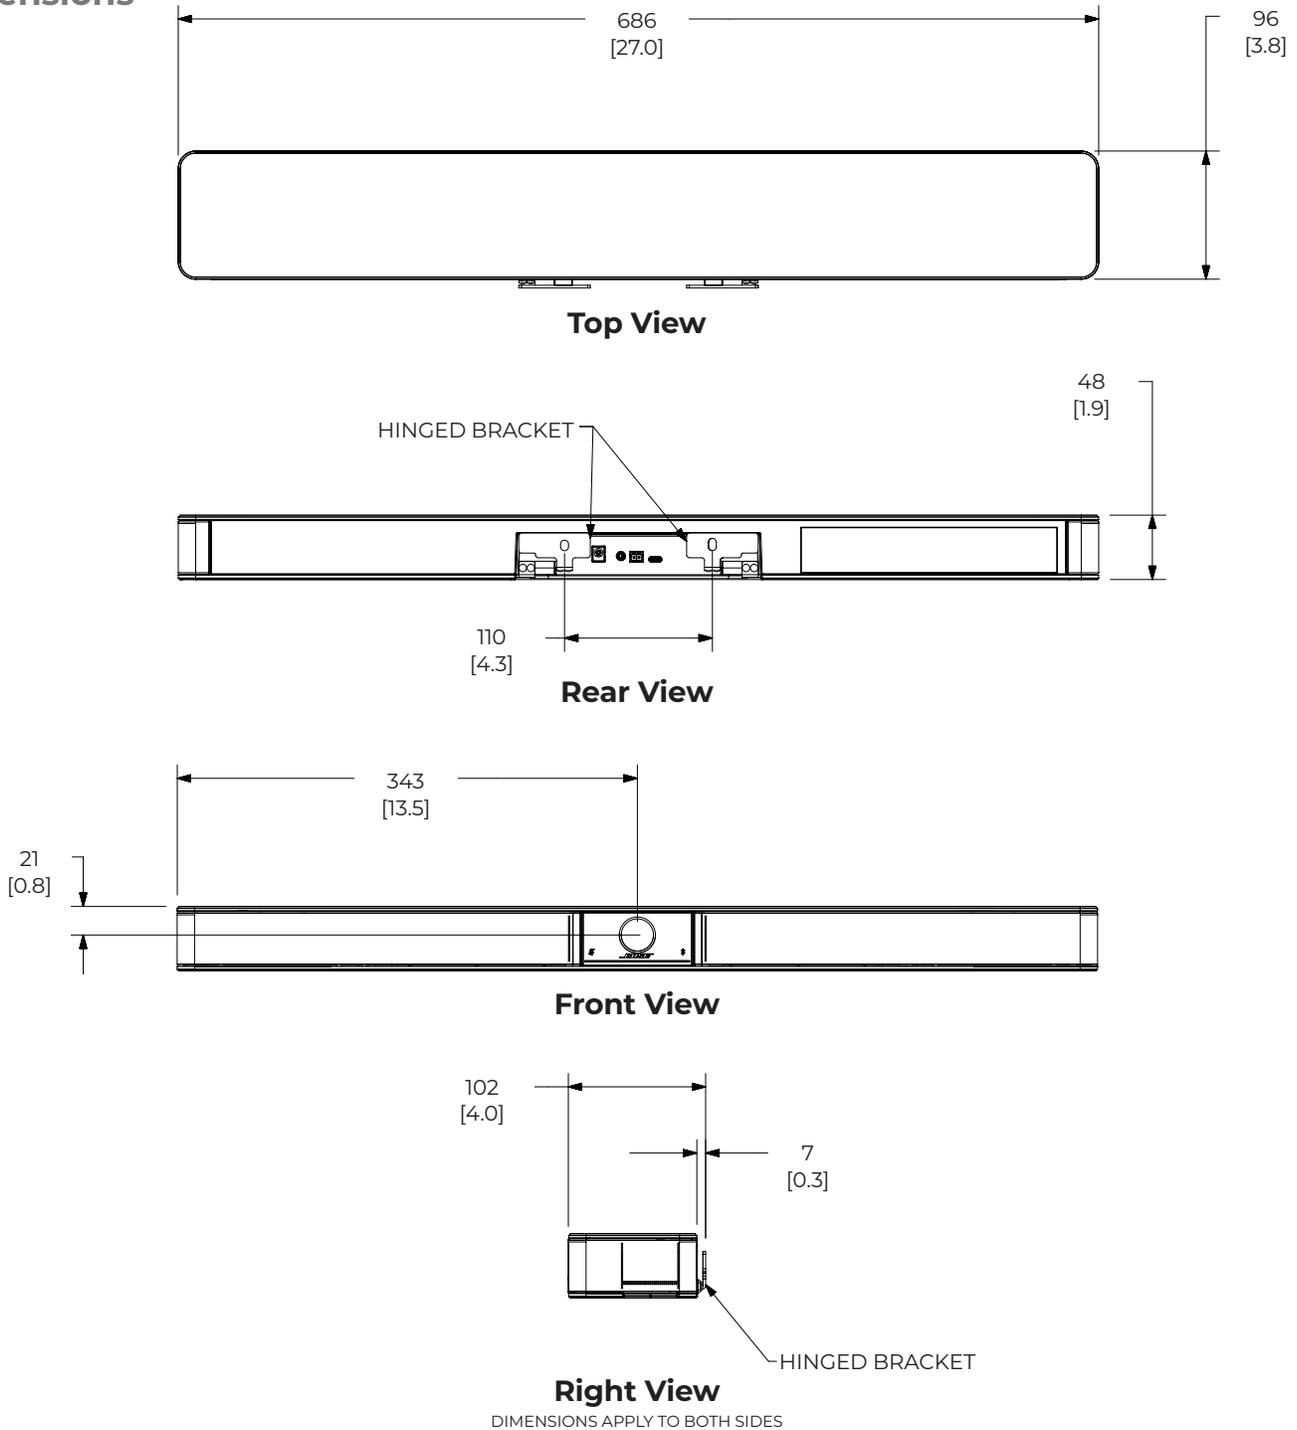

1. Dimensions are shown in millimeters over inches.

Videobar is a trademark of Transom Post OpCo LLC. Bose is a trademark of Bose Corporation. Android, Chrome, Chromebook, Hangouts and other marks are trademarks of Google LLC. The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Bose Professional is under license. DisplayLink® is the registered trademark of DisplayLink Corp. in the EU, the US, and other countries. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. macOS is a trademark of Apple Inc. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum and are only intended for use with products based on and compliant with the USB Type-C® cable and connector specification. Wi-Fi is a registered trademark of Wi-Fi Alliance®. Zoom is a trademark of Zoom Video Communications, Inc. All other trademarks are the property of their respective owners.

For additional specifications and application information, please visit BoseProfessional.com. Specifications subject to change without notice. 11/2023