

ControlSpace EX-8ML

mic/GPIO Dante™ endpoint

Product Overview

Optimized for use with the EX-1280C, the EX-8ML Dante™ endpoint, is a convenient, cost effective solution for connecting up to 8 conferencing microphones over a single Cat 5/6 cable. Whether used under a conference table, daisy-chained with other EX or endpoints, or standalone in a rack, the EX-8ML adds 8 high-quality microphone/line inputs, 8 GPI, and 16 GPO to your networked audio system. Autodiscovery, drag and drop programming, auto-routing, and simplified logic control in ControlSpace Designer make configuring the EX-8ML easy. Tasks such as configuring microphone LED status and microphone mute actions are greatly simplified within ControlSpace Designer without requiring external control system programming.



Key Features

One-cable-to-the table connectivity supports PoE+ and Dante audio networking to maximize ease of integration

Internal 12 volt supply for localized sourcing of power for microphone LEDs

Dual network and power connectors allow daisy-chaining of multiple ControlSpace EX endpoints

Rotatable mounting tabs allow for multiple installation options

Low-profile aluminum enclosure for unobtrusive under-table mounting

Simplified software configuration via ControlSpace Designer software. Supports auto-discovery, auto-routing, and logic presets for microphone LEDs and pushbuttons.

Integrated power and signal indicators via recessed LEDs

Optional magnetic mounting plate simplifies single-handed installation

Accessory 60 W power supply available for increased endpoint connectivity

Applications

Designed for a wide range of applications, including:

- Boardrooms
- Medium/large conference rooms
- Courtrooms
- Distance learning
- Auditoriums
- Multipurpose spaces

ControlSpace EX-8ML

mic/GPIO Dante™ endpoint


Technical Specifications

AUDIO INPUTS	
Input channels	Eight (8) analog, balanced microphone/line level
Connectors	Eight (8) 3.81 mm detachable Euroblock connectors, 7-pin
Phantom power	+48 VDC, software selectable per input
Control GPIO	2 logic outputs (100 mA low, 8 V open, 10 mA @ 2.5 V high) 1 logic input (0 to 5 V, threshold = 1.6 V, 2 kΩ pull-up to 5 V)
Gain settings	0 / +15 / +30 / +45 dB, software selectable
Input impedance	>1.8 kΩ at any gain setting
Equivalent input noise	-115 dBu (+45 dB gain)
Maximum input level	+8 dBu (0 dB gain)
System THD	<0.01 % at any gain setting, input signal 3 dB below maximum
Frequency response	20 Hz – 20 kHz, ±1 dB
NETWORK	
Connectors	Two (2) RJ-45, one front (supports PoE+), one rear
Audio over IP	Dante™ Brooklyn II X8
POWER	
Microphone LED power	+12 VDC, 400 mA
PoE class	Class 0 802.3at PoE+, PD compliant
Connectors	(1) 3.81 mm Euroblock connector, 2-pin, (1) 5.5 barrel with positive center
External power supply	+12 VDC, daisy-chainable
Power consumption	5.6 W plus 2 W for phantom power if used
Maximum PoE+ power	24 W (internal +12 VDC output)
SOFTWARE APPLICATIONS	
Configuration	ControlSpace Designer software v5.0 or later
GENERAL	
LED status indicators	Power LED, eight (8) tri-color signal status for input channels
Digital conversion	48 kHz / 24-bit
Certifications	FCC Part 15 Class A; UL 60950-1, 2nd edition, 2014-10-14, CAN/CSA C22.2 No. 60950-1-07, 2nd edition, 2014-10, IEC 60950-1:2005 (2nd edition)
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)
Accessories	ControlSpace EX Endpoint Microphone Extension Cable (790081-0010) ControlSpace EX Endpoint Mounting Bracket (790080-0110) ControlSpace EX Endpoint Power Supply (800446-1110)
PRODUCT CODES	
ControlSpace EX-8ML	CONTROLSPACE EX 8-CH MIC/GPIO Dante UTB (772045-0110)

ControlSpace EX-8ML

mic/GPIO Dante™ endpoint

Front Panel

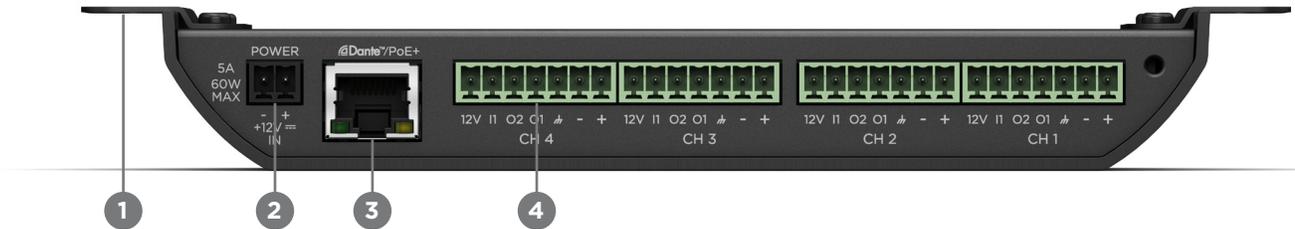

1. **Rotatable Mounting Tabs:** For multiple mounting options
2. **+12 VDC Connector:** External DC power supply input
3. **Gigabit Network Port:** Supports PoE+, Dante and network control
4. **Microphone Analog Inputs (4):** Provides connection to conference mic: +48V phantom power, 2 GPO, 1 GPI, +12V per channel

Rear Panel




1. **Rugged Metal Enclosure:** Sleek and unobtrusive for under-table use
2. **Microphone Analog Inputs (4):** Provides connection to conference mic: +48V phantom power, 2 GPO, 1 GPI, +12V per channel
3. **Dante/Network Connector:** Daisy-chainable Dante or service port
4. **Daisy-Chainable Power Output:** For daisy-chaining power to additional EX endpoints

ControlSpace EX-8ML

mic/GPIO Dante™ endpoint

Mechanical Diagrams¹



Front View



Rear View



Right View


DIMENSIONS APPLY TO BOTH SIDES




29 mm

[1.1]

Top View

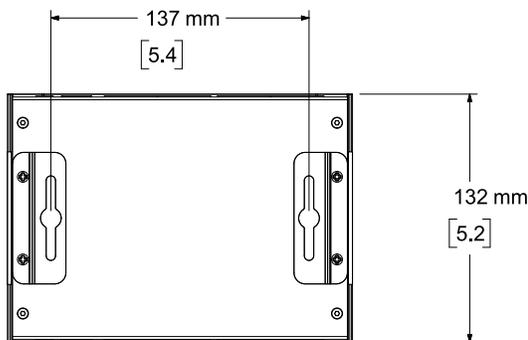

Bottom View

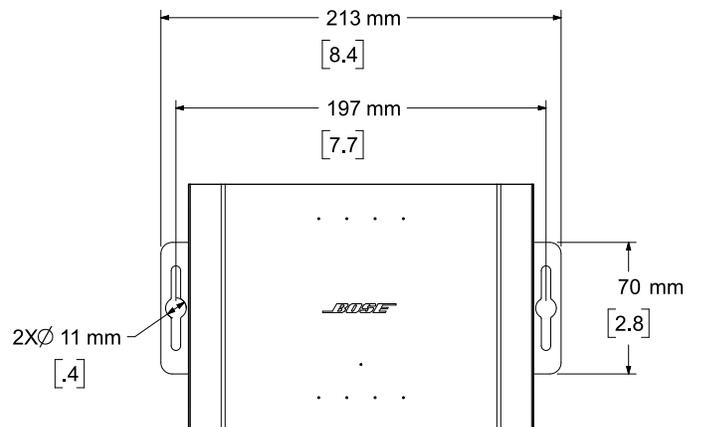

1. DIMENSIONS ARE SHOWN IN MILLIMETERS OVER INCHES.

Bose is a trademark of Bose Corporation. ControlSpace is a trademark of Transom Post OpCo LLC. Dante® is a registered trademark of Audinate Pty Ltd. All other trademarks are the property of their respective owners.

For additional specifications and application information, please visit boseprofessional.com. Specifications subject to change without notice. 03/2023